

EWM LED Flood Light 10W-50W

Replaces 20 – 150W HID



Features

- UL/cUL & DLC Listed, LM79 & LM80
- Ultra slim
- Premium quality SMD LEDs with high lumen output
- Quality integrated driver, high driver efficiency >87%, PF>.9
- Excellent heat dissipation
- Wet location, IP65
- 5 year warranty

Ordering information


Family	Size	Watts	Voltage/Driver	Lens Beam	CRI Color	Connector	Sort #
FL	SM = Small	10 = 10W 15=15W 20 = 20W 25= 25W 30=30W 50= 50W	MIN= Multi-Volt, Internal, No Dim	C Clear 110 110 Deg	8 80+ 40 4000K 50 5000K	Y0 = Yoke Mount K0 = Knuckle Mount K3 = Knuckle w/Photocell	382

Example: FL-SM-10-MIN-CGT2-850-Y0-382


SPECIFICATIONS

WATTAGE	10	15	20	25	30	50
LUMENS	1150	1250	2300	2875	3600	6000
LUMENS PER WATT	115	83	100	103	120	120
BEAM ANGLE	110°					
COLOR TEMPERATURES	4000K, 5000K					
INPUT VOLTAGE	120V	120V	120V	120V	100-277V	100-277V
HERTZ	50/60 Hz					
CRI	80					
LED L70 LIFETIME	100,000 hrs					
MOUNTING OPTIONS	Knuckle or yoke					
CONTROL OPTIONS	N/A					
DIMENSIONS (in)	5.31*3.54*1.38	7.48*5.12*1.5	9.54x6.51.85	11.8*8.3*2.2		
WEIGHT						
CERTIFICATIONS	UL, DLC					
WARRANTY	5 years					


Photometric

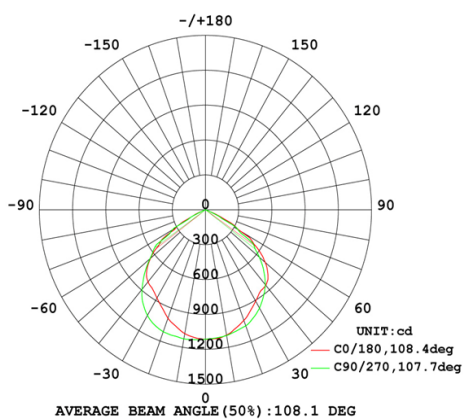

30W

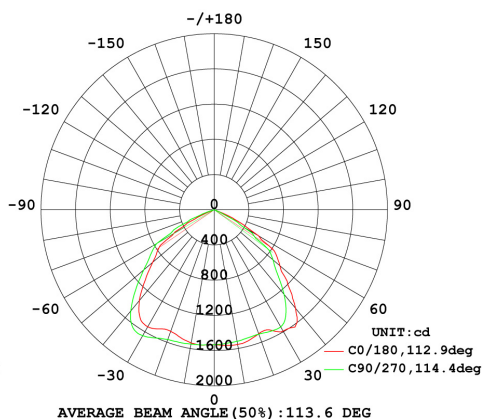

50W (5500K)

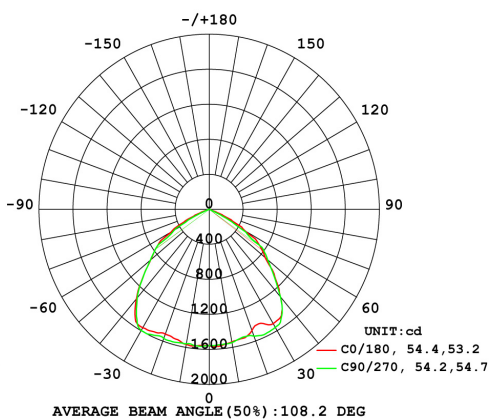

50W (4100K)

Product enhancements may result in specification changes without notice. Contact us for the latest information

Operating Cost Comparison

25W HID 29W (incl. ballast) 20,000	EWM 10W 10W 100,000	Comparison 64% reduction 5 longer life- less maintenance!
50W HID 57W (incl. ballast) 20,000	EWM 20W 20W 100,000	65% reduction 5 longer life- less maintenance!
100W HID 115W (incl. ballast) 20,000	EWM 25W 25W 100,000	78% reduction 5 longer life- less maintenance!
120W HID 138W (incl. ballast) 20,000	EWM 30W 30W 100,000	78% reduction 5 longer life- less maintenance!
150W HID 172W (incl. ballast) 20,000	EWM 50W 50W 100,000	71% reduction 5 longer life- less maintenance!